



# Toyota Radio Wire Harnesses

## Up To 1983-1986

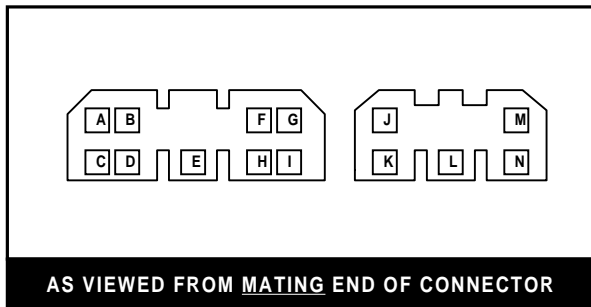

Pin	What It Is	Typical Toyota In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Right Front Speaker (+)	Green	Gray
B	Left Front Speaker (+)	Pink	White
C	Right Front Speaker (-)	Blue	Gray w/ Black Stripe
D	Left Front Speaker (-)	Purple	White w/ Black Stripe
E	Ground Wire	Black	Black
F	+12 Volt Ignition Wire	Gray	Red
G	Power Antenna Wire 1		Blue (join wires 1 & 2 together to this blue wire)
H	Power Antenna Wire 2		
I		<b>Do Not Use</b>	
J	Right Rear Speaker (+)	Red	Purple
K	Right Rear Speaker (-)	White	Purple w/ Black Stripe
L	+12 Volt Battery Wire	Blue w/ Yellow Stripe	Yellow
M	Left Rear Speaker (+)	Black	Green
N	Left Rear Speaker (-)	Yellow	Green w/ Black Stripe

## 1987 And Newer

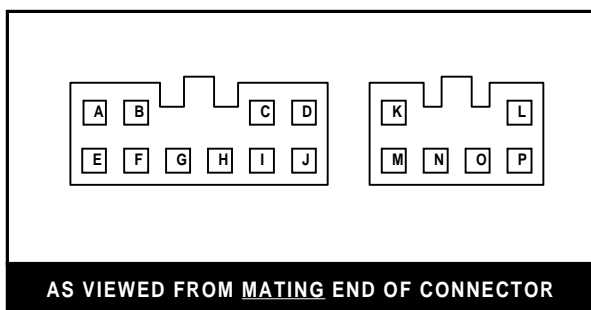

Pin	What It Is	Typical Toyota In Dash Wire Color	Typical New Radio Equivalent Wire Color
A	Right Front Speaker (+)	Green	Gray
B	Left Front Speaker (+)	Pink	White
C	+12 Volt Ignition Wire	Gray	Red
D	+12 Volt Battery Wire	Blue w/ Yellow Stripe	Yellow
E	Right Front Speaker (-)	Blue	Gray w/ Black Stripe
F	Left Front Speaker (-)	Purple	White w/ Black Stripe
G	Ground Wire	Black	Black
H	Power Antenna Wire 1		Blue (join wires 1 & 2 together to this blue wire)
I	Power Antenna Wire 2		
J		<b>Do Not Use</b>	
K	Right Rear Speaker (+)	Red	Purple
L	Left Rear Speaker (+)	Black	Green
M	Right Rear Speaker (-)	White	Purple w/ Black Stripe
N		<b>Do Not Use</b>	
O		<b>Do Not Use</b>	
P	Left Rear Speaker (-)	Yellow	Green w/ Black Stripe

**Note:** using an optional snap on wire harness adapter will simplify the wiring. Most snap on wire harness adapters have already converted and color coded the wires from the auto makers in dash wire harness to match typical aftermarket radio wire colors.

\*\* The wire colors listed in the chart above are typical for these vehicles during these years but may not be the exact colors for this vehicle. This is another reason to use a snap on wire harness adapter. \*\*